



Turbo mode

When the air conditioner goes into Turbo mode, it will maximize its cooling or heating capacity, making the room cooler or warmer rapidly.



I FEEL

The remote control can keep track of the temperature at its current location and send the signal to the air conditioner, so it can optimize the room temperature for your maximum comfort.



Anti-fungus

The air conditioner will start the Anti-fungus feature after exiting cooling and dehumidifying mode. It helps prevent fungi and bacteria from spreading in order to maintain a healthy environment.




Horizontal swing

You can use the horizontal swing feature to adjust the airflow direction, if you prefer the air from the AC to blow sideways.



Intelligent defrosting

If the condenser freezes while in heating mode during the times of low outside temperature, the AC will start intelligent defrosting mode.

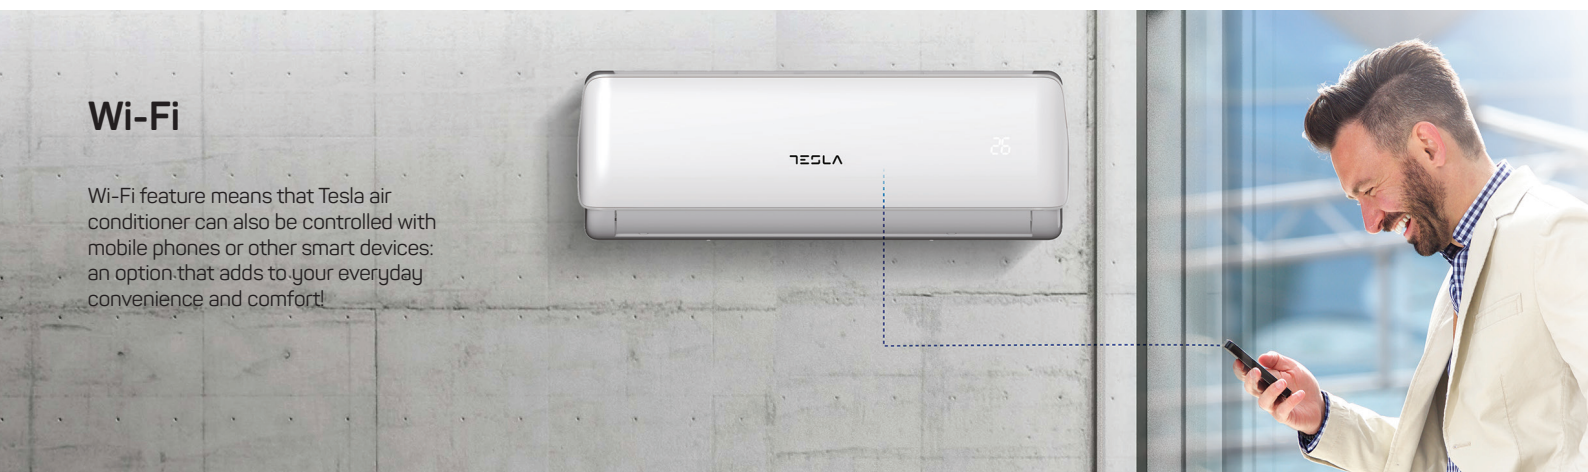

Wi-Fi

Wi-Fi feature means that Tesla air conditioner can also be controlled with mobile phones or other smart devices: an option that adds to your everyday convenience and comfort!



Features

I Feel / Follow me, Breeze away, Smart Air Flow, ECO, Super EMC performance, Self-diagnostic, Intelligent defrosting, Self-Cleaning Function, Anti-fungus Function, Anti-Rust Cabinet, Independent Dehumidification mode, Super Quiet Design, Low-noise airflow, Turbo mode, Auto mode, Sleep Mode, Fault Code Indication, Auto restart, Timer, 4-Fan Speed, Five-speed outdoor fan, Low-Temperature Heating/Cooling, Honeycomb FILTER, Washable filter, 1W Standby, Dual side Drainage, Wide Voltage Range Start-up, 56°C sterilization, Refrigerant Leakage Detection, Remote control, Louver position memory function, Hidden led display, Display ON/OFF, Comfortable Cooling, Strong Cooling at 60°C, Rapid Cooling and Rapid Heating, RC holder, Smarter design louver, Easy cleaning, Hydrophilic Aluminum Fin, Backup Switch, Multi Fan Speed, I-clean, Intelligent on-off, Top plate/cover improved, Auto Swing Louver, Anti-Cold Air, Horizontal swing, Wi-Fi, Additional Health filter

Capacity			12000BTU
Rated volt and frequency		V/Hz	220-240V~/50HZ
Mode			Cooling Heating
Rated capacity		W	3500(800-3800) 3800(1000-4200)
Power input		W	1180(100-1600) 1100(300-1600)
Current input		A	5.6(0.7-7.8) 4.9(0.6-6.4)
SEER-SCOP/ Energy Class		W/W	6,19/A++ 4,03/A+
Operating range		(°C)	16~49°C -15~30°C
Energy consumption (per year, based on standard test results)		kwh	198 938
Dehumidifying		Kg/h	1
Degree of protection (IN) / (OUT)		(IP)	IPX0/IPX4
Class of electric protection (IN) / (OUT)		Class I / Class II	I/I
Max. input consumption		W	1900
Max. current		A	9,5
Compressor	Model		KSN98D34UER3
	Type		DC
	Brand		GMCC
Indoor	Fan motor	Model	YYK18-4B
		Power input	W
		Capacity	uF
		Indoor Fan Speed RPM	1280/1130/990/850
	Indoor fan	Dia. / Length	mm
	Indoor Air Circulation		m³/h
	Indoor Noise Level dB		dB(A)
	Net Dimension (L×W×H)		mm
	Packing Dimension (L×W×H)		mm
	Net Weight/Gross Weight		Kg
Outdoor	Fan motor	Model	D-35-10A
		Power input	W
		Capacity	uF
		Outdoor Fan Speed RPM	920/700/540
	Outdoor fan	Length	mm
	Outdoor Noise Level dB		dB(A)
	Net Dimension (L×W×H)		mm
	Packing Dimension (L×W×H)		mm
	Net Weight/Gross Weight		Kg
	Refrigerant type/weight		g
	Max. Discharge/Max. Suction pressure		Mpa
Refrigerant piping		Liquid side / Gas side	mm
		Max. refrigerant pipe length / Max. difference in level	m
			20/10